



## Serving Lines, Fiberglass Refrigerated Cold Pan models SCA

model ☐ 14GFG SCA-2 ☐ 14GFG SCA-3 ☐ 14GFG SCA-4 ☐ 14GFG SCA-5 ☐ 14GFG SCA-6  
☐ 14GFG SCA-4S ☐ 14GFG SCA-5S ☐ 14GFG SCA-6S

### Description:

Randell's 14GFG SCA Series Self-Contained Mechanically cooled Cold Pan Units designed for virtually any cold food serving application, the 14GFG SCA series is enclosed in a brilliant one-piece fiberglass body and 14 gauge stainless steel top.

### Specifications:

**CABINET CONSTRUCTION:** One-piece molded fiberglass body for smooth exterior finish. All corners and areas where accessories are mounted are reinforced internally with metal backers.

**TOP CONSTRUCTION:** Exterior top is standard in reinforced 14 gauge 300 series stainless steel with #4 finish.

**COLD WELL CONSTRUCTION:** The cold pans are constructed of die formed stainless steel and are provided with a drain and a gate valve. The gate valve is accessed through the mechanical (compressor) housing with louvered access door. Draining is accomplished by setting a bucket in front of the door and opening valve (simple and easy-eliminates floor drain requirements).

This equipment is intended for use in rooms having an ambient temperature of 86°F (30°C) or less.

### Standard Features:

- Easy access to service the condensing coil through the hinged louver
- Concealed locking mechanism with easy to use spring-activated catch
- Hinged access to drain gate valve
- Easy access to thermostat through the hinged louver panel
- Single-Sided louver designed to efficiently cool system without need for auxiliary louvers on the opposite side

### Additional Available Configurations:

#### •14GFG SCA "S" Series

Same basic construction of standard enclosed base series with an optional open shelf storage compartment. Available in the 4, 5 & 6 pan models to offer most efficient space capacity.

model 14GFG SCA-4S shown with optional kick plate, trayslide and counter protector









### Available Fiberglass Colors:

- ☐ Pitch Black
- ☐ Dark-Bark Brown
- ☐ Cabernet Wine
- ☐ British Racing Green
- ☐ Tin Man Gray
- ☐ True Blue
- ☐ Light Sky Blue
- ☐ Candy Apple Red
- ☐ Tiger Lilly Orange
- ☐ Canary Yellow
- ☐ White

### Options & Accessories:

- ☐ Canopy
- ☐ Overshelves
- ☐ Trayslides
- ☐ Corian top
- ☐ Granite top
- ☐ Kick Plate
- ☐ Graphics
- ☐ Sneeze Guards
- ☐ Elementary School Height
- ☐ Electrical Distribution System



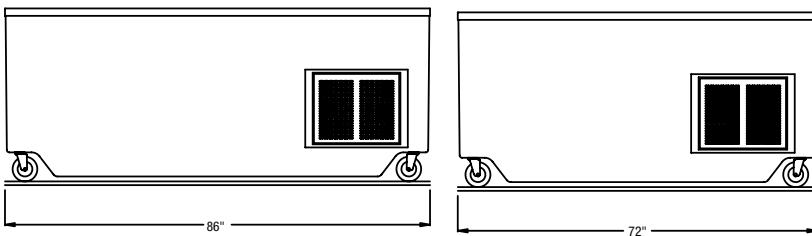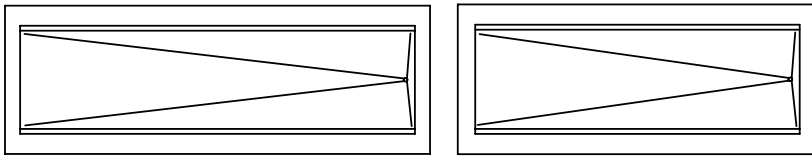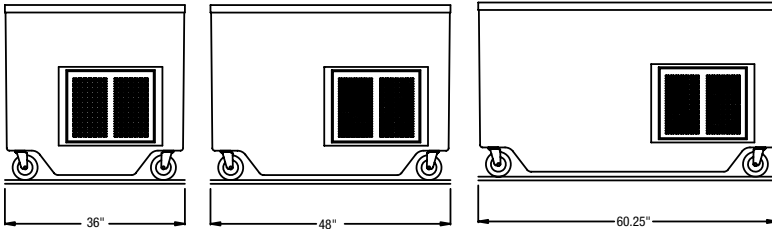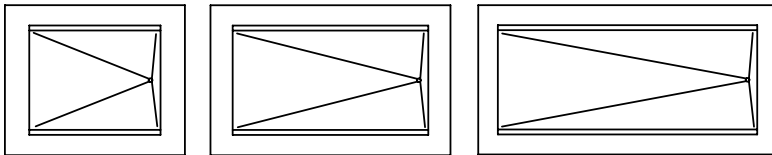



**LEGEND FOR  
RANFG SCA**

AFF =  
ABOVE FIXED FLOOR

**J**  
J-BOX - 14" AFF  
120V/60Hz/1PH  
R-404A Ref  
9' CORD NEMA#5-15P

**HP**  
HP COMPRESSOR

1" DIA PVC DRAIN  
LINE EXTENDS TO  
LOUVER



"S" Model

**14GFG-SCA DRAWINGS SHOWN, 14GFG SCA-S FRONT VIEW SHOWN  
AS REPRESENTATION OF "S" MODELS**  
Drawings are to be viewed in the same order as the chart

**COMMON DATA FOR SCA SERIES (INCLUDES THE STANDARD SCA SERIES  
AND THE "S" STORAGE BASE SERIES)**

Model	L (A)	Top Depth	Work Height	No. of 12x20 wells	H.P.	Volts	NEMA	AMPS	Ship Wt.
14GFG SCA-2	36"	30"	35"	2	1/4	115V	5-15P	5	250
14GFG SCA-3	48"	30"	35"	3	1/4	115V	5-15P	5	300
14GFG SCA-4(S)	60.25"	30"	35"	4	1/4	115V	5-15P	5	350
14GFG SCA-5(S)	72"	30"	35"	5	1/4	115V	5-15P	5	400
14GFG SCA-6(S)	86"	30"	35"	6	1/4	115V	5-15P	5	450

**STORAGE SHELF INFORMATION FOR SCA "S" SERIES**  
2 & 3 pan not available with storage shelf (too small)

Model	L(A)	W(B)	H(C)	Ship Wt
14GFG SCA-4S	60.25"	25.5"	14.5"	375
14GFG SCA-5S	72"	37.5"	14.5"	425
14GFG SCA-6S	86"	51.5"	14.5"	475

Amp loads may change when adding incandescent light options.

